



Packaging

StarRfoam Packaging is a lightweight, closed cell, rigid insulation manufactured from expanded polystyrene (EPS). It offers excellent dimensional stability, compressive strength, and water-resistant properties. EPS packaging has been trusted by many industries for over 50 years because of these properties.

APPLICATIONS


Protecting & transporting products
Storage

BENEFITS

Stable R-value	Environmentally friendly
Cost-effective	Proven consistency
Mold resistant	User friendly
Moisture resistant	Termite protection available

OPTIONS

Available sizes:
Contact your local sales representative for custom shapes and sizes.

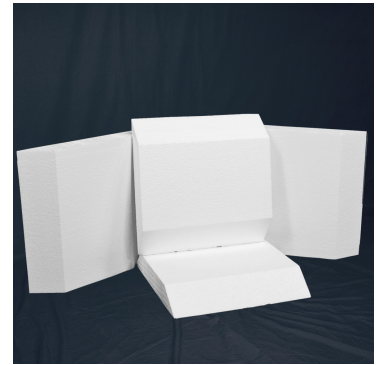

LOCATIONS

KINGMAN, AZ

4555 Olympic Way
Kingman, AZ 86401

928-681-2800

ANTHONY, TX

1004 Omar Road
Anthony, TX 79821

915-886-4636

ARLINGTON, TX

3220 E. Avenue F
Arlington, TX 76011

800-722-6218

PHYSICAL & THERMAL PROPERTIES

PROPERTIES	TYPE XI	TYPE I	TYPE VIII	TYPE II	TYPE IX	TYPE XIV	TYPE XV	TEST METHOD
Nominal Density (psi)	0.7	1.0	1.25	1.5	2.0	2.5	3.0	ASTM C303
Thermal Resistance (R-Value)								
(per inch) at @25F	3.60	4.35	4.55	4.76	5.00	5.05	5.10	ASTM C518 or C177
(per inch) at @40F	3.40	4.17	4.25	4.55	4.76	4.85	5.05	
(per inch) at @75F	3.20	3.85	3.92	4.17	4.35	4.50	4.60	
Water Vapor Permeability (perms)	5.0	3.5	3.5	2.5	2.5	2.5	5.0	ASTM E96
Water Absorption (max. % volume)	4.0	4.0	3.0	3.0	2.0	2.0	2.0	ASTM C272
Oxygen Index, Min.	24%	24%	24%	24%	24%	24%	24%	ASTM D 2863

STRENGTH PROPERTIES

PROPERTIES	TYPE XI	TYPE I	TYPE VIII	TYPE II	TYPE IX	TYPE XIV	TYPE XV	TEST METHOD
Compressive Strength @10% deformation, min. (psi)	5.0	10-14	13-18	15-21	25-33	40.0	60.0	ASTM D1621
Flexural Strength (min. psi)	10.5	25.0	30.0	35.0	50.0	60.0	75.0	ASTM C203
Dimensional Stability	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	2.00%	ASTM D2126
Flame Spread	<20	<20	<20	<20	<20	<20	<20	ASTM E84

LOCATIONS

KINGMAN, AZ

4555 Olympic Way
Kingman, AZ 86401

928-681-2800

ANTHONY, TX

1004 Omar Road
Anthony, TX 79821

915-886-4636

ARLINGTON, TX

3220 E. Avenue F
Arlington, TX 76011

800-722-6218