
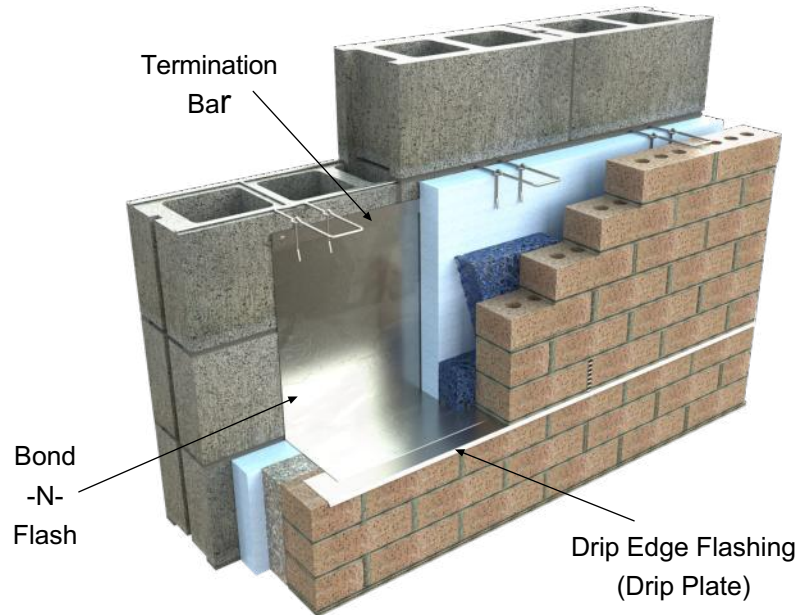


# PRODUCT SUBMITTAL

**WIRE-BOND**

## BOND - N - FLASH

### 304 Stainless Steel Flashing

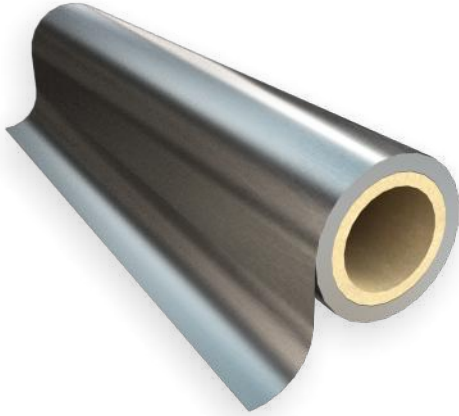

Bond N Flash should be placed 2" onto the drip edge but not more that 2-1/4". Laps at splices should be a minimum of 4".

#### Description:

BOND-N-FLASH stainless steel composite flashing consists of 2 mils of stainless steel (type 304) bonded on one side to a permanent woven film fabric. BOND-N-FLASH Mastic is used to seal all seams and laps.

#### Technical Data:

Property	Avg. Values	Test Method
Puncture	2,500 psi	ASTM E154
Tensile Strength	100,000 psi	ASTM D882
Fire Resistance	Class A, Pass	ASTM E84
Mold Resistance	Pass	ASTM 3273

Stainless Steel certified to meet: ASTM A240/A240M

#### Features and Benefits:

- 304 Stainless Steel
- Permanent UV Resistance
- Fire Resistant
- Mold Resistance
- High Puncture and Tear Resistance
- Flexible for easy job site formation
- Warrantied

#### Applications:

- Thru-Wall Flashing
- Head and Sill Flashing
- Spandrel Flashing
- Roof-Parapet Flashing
- Perimeter Flashing-Curtain Wall
- Base Flashing
- Transition Membrane ( Waterproofing, Roofing, Air Barriers )

Total recycled content 65%

Post Industrial recycled content 65%

Post Consumer recycled content 0%

LEED – EA credit 1 and EQ credit 4.1

BOND-N-FLASH is compatible with air barriers, insulation boards, spray polyurethane foam, roofing membranes, asphaltic flashings, and below grade waterproofing products. Can be used with limestone since it is non-staining.

**Weight:** 2 mils of stainless steel (type 304) bonded on one side to a permanent woven film fabric.

**Width:** ( 75 lf rolls )

12"      16"      18"      24"      36"

#### BOND -N- FLASH Primer - Water Based

4 gallon pail

#### QUIK SET SEALANT

10.2 oz. cartridge

#### BOND -N- FLASH Primer - Solvent Based ( Winter Grade )

4 gallon pail

**Termination Bar:** **Note: A Termination Bar is required for surface-mounted applications.**

Stainless Steel ( Type 304 )

PVC

**#4165 Drip Edge Flashing:** 26 gauge Stainless Steel x 8 - 0' ( Drip Plate )

1-1/2" width

3" width

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224

**WIRE-BOND**

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113

[www.wirebond.com](http://www.wirebond.com)